

*Susan
Guagliumi*

GiGi Jacket

This gorgeous novelty yarn produces a texture close to Persian lamb! Warm enough for winter wear, this jacket will be a favorite for years ahead.



Size: S/M (M/L) oversized 3/4 length jacket with finished chest measurement 46 (50)" and finished length 26.5 (27.5)".

Stitch Size: 7 or to get gauge in knit weave as fol. Model garment was K on the SK860.

Gauge: 5 STS/ 6.66 Rs = 1".

Machine: SK860 (or LK150) mid gauge (6.5 mm).

Accessories: EC-1 (LW-1 weaving attachment for LK150).

Materials: Reynold's "Paterna" (100% wool with 110 yd/1.75-oz skein), 20 skeins black #50 for MC. Adrienne Vittadini's "GiGi" for JCA Yarns (50% wool/50% alpaca with approx 66 yd/50-g ball), 10 balls color #7638 for CC. (Note: Some of the "Paterna" colors are available on cones. Check with your local dealer.) 5 buttons, size 7/8". Shoulder pads optional.





Knitting Notes: For SK860, use pat # 5 on design card #1. Place PCs at edges of K, N1 at center of bed, L #1 & #2 lights on EC-1, width indicator 8 and cam lever on stockinette. For LK150, hand

pull pat as shown on page 12. It is imperative that the weaving brushes move freely when knit weaving (K/W) with this much texture. Unscrew each brush and remove any fuzz before you beg. For the LW-1, loosen the screw that holds the brush by 1/4 turn if you find that the weaving yarn is not catching.

Knitting Directions

Back: With scrap and ravel cord, C/O 115 (125) STS. RC 000. With inspection light on line up first R of design card, put side levers back and K 1 R with MC. Turn off inspection light and catch CC in leading weaving knob. K/W to RC 110 (114) to beg shaping armholes. Dec 1 ST each side EOR 4 times, then every 4th R 3 times. 101 (111) STS rem. Cont to RC 66 (70). Separately S/O 35 (38) STS for each shoulder, 31 (35) STS for center back neck.

Fronts: K 2 in reverse. *Pockets:* With scrap and ravel cord, C/O 35 STS and K/W 40 Rs. Latch tool B/O loosely. *Make 5 button-*

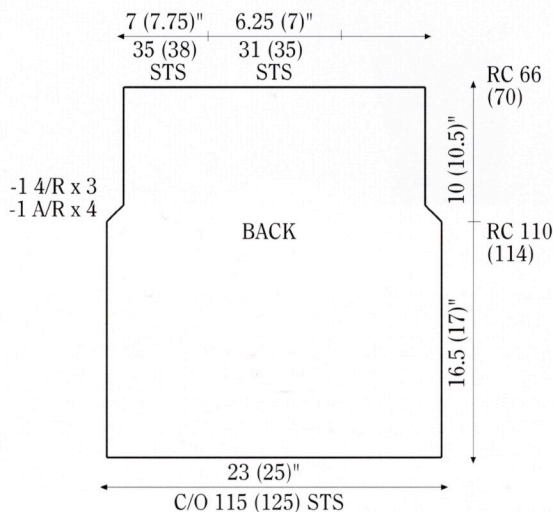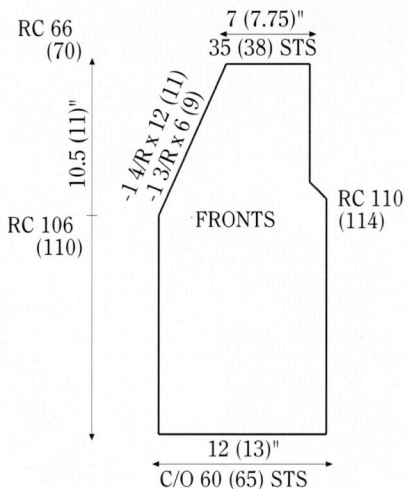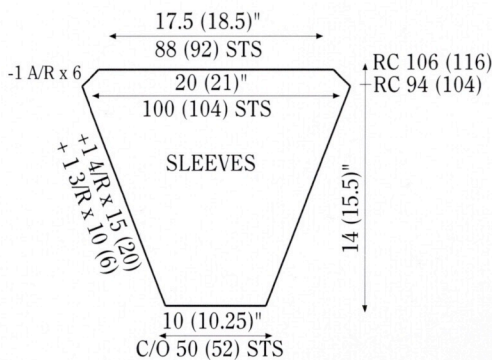

Stitch Pattern for Weaving

holes on RT front at RCs 6, 31 (32), 56 (58), 81 (84), 106 (110) by tr 3rd and 4th STS from edge to 2nd and 5th NDLS. Leave both NDLS in WP, K the next R then use the loop lying across the 2 empty NDLS to e-wrap them before cont. *Fronts:* With scrap and ravel cord, C/O 60 (65) STS. RC 000. K 1 R with MC then K/W to RC 14 to beg attaching pocket. With K side of pocket facing you and C/O edge at top, fold scrap K out of the way and P/U the live STS at beg of pocket and hang on center 35 NDLS. EOR P/U edge ST of pocket and hang on same outside NDL, 18 times. Cont to RC 106 (110) and hang yarn tag to mark beg of V-neckline. Dec 1 ST every 3 Rs 6 (9) times, then dec 1 ST every 4 Rs 12 (11) times at neckline edge. *At the same time,* beg at RC 110 (114) dec 1 ST EOR 4 times, then every 4th R 3 times at the armhole edge. RC 000. Cont to RC 66 (70). S/O rem 35 (38) STS.

Sleeves: K 2 alike. With scrap and ravel cord C/O 50 (52) STS. RC 000. K 1 R with MC then K/W to RC 94 (104), inc 1 ST each side every 3 Rs 10 (6) times and every 4 Rs 15 (20) times. Then dec 1 ST each side EOR 6 times. At RC 106 (116), S/O rem 88 (92) STS.

Finishing Directions

Lightly steam pieces. Do not press. Fold back scrap K and with slip crochet join both shoulder seams firmly; then join sleeves to armholes. Sew side and sleeve seams. Fold back scrap K at lower edges of sleeves and garment to work 1 R slip crochet then 1 R backwards crochet with CC. Sew buttons to L front edge.

Susan Guagliumi is the editor of *Studio Design Magazine* and Education Director for Studio by White Knitting Machine.

