

JAN/FEB 1992

Studio
by WHITE

\$3.50

DESIGN



**CABLES
ON THE EDGE!**

Chelsea Tweed

by
George LeWarre'
and Susan Guagliumi



Short row shapings, reverse stockinette, and a unique rib bind off make this sweater simply sensational!

Machine
SK151/1155/890 with ribber.

Yarn
Tahki "Chelsea" (65% silk/ 35% wool), color #162 black/white tweed, 11 (12) oz.

Size
Small//Medium (Medium/Large) with finished bust measurement 40"(44").

Stitch Size
Stockinette with stitch size 4 or to get gauge. Rib with stitch size R or to get gauge.

Stockinette Gauge
4.44 sts/ 5.33 Rs = 1".

Rib Gauge
4.5 Rs = 1".

Short Row Instructions

Begin short rowing front/back sections at RC 92(96), holding 1 st every row until all NDLS are in holding position at RC 110. Begin short rowing front from left side; back from right side. At RC 110, knit 1 row across all NDLS. Then scrap off all stitches, turn the work over, and rehang. Do not remove scrap yarn as it will be used later as a guide for applying the diagonal cable. Put all NDLS into holding position. Reset RC 92 (96) and begin knitting on the first NDL at right for front, at left for back. Return 1 NDL to C position every row until all NDLS are working again at RC 110. The front neck shapings will start before the short row increasing is

completed. It is simplest to work the first side of the neck on the same side as the increasing.

Back

Begin with scrap yarn and c/o over a width of 90 (98) NDLS and knit some rows. With main yarn and stitch size 4, knit to RC 92 (96). Set carriage for holding and follow short row instructions above, decreasing from the right. After work is turned, knit with short row increases to RC 110, then straight to RC 120 (124). Tag edge stitches for armholes at RC 60 (64). Scrap off stitches in three sections: 30 (32) sts for each shoulder, 30(34) sts for back neck.

Front

Knit same as back, but begin short row decreases on the left side. After work is turned, start short row increases on the right and knit to RC 104 (108) to begin shapings left side of neck. At the same time, continue short row increases on left shoulder sts to RC 110. With carriage on the left, hold center 10 (14) sts and all NDLS to the right of them. Continue shapings neck every other row (carriage on left) by holding 4, 3, 2, 1 sts. Wrap to prevent holes. When short row increasing and neck shapings are completed, knit straight to RC 120 (124) and scrap off. Return right shoulder NDLS to working position and repeat for second side. Make stitches as needed along the straight edges of neckline by picking up 1 full st and hanging on the NDLS. Knit 1 row across all neckline sts and then scrap off.

Sleeves

Knit two alike from the top down. With scrap yarn, c/o over a width of 98

NDLS. Knit some rows and change to main yarn. Knit to RC 84 (90), decreasing 1 st, every 3 rows, 28 times. 42 sts remain and carriage is on the right.

Hang comb and weights and transfer every other stitch from the main bed to the ribber for 1X1 rib. With stitch size R, knit 10 rows and transfer all stitches to main bed. Put all NDLS into holding position and follow directions for the Duffey cabled edging.


NOTE: When knitting the second sleeve, scrap off all stitches at RC 84 (90), turn the work over, and rehang before knitting the rib.

Front/Back Ribs

Rehang the lower edge on the main bed with the purl side of the lower short row triangle facing you. Knit ribs as directed for sleeves and finish with Duffey cabled edging.

Front/Back Diagonal Cables

These cables are applied by rehangng the entire diagonal on the machine, right side facing you. Using the scrap yarn (that was knitted to turn the work over) as a guide, pick and rehang up all 90 (98) sts. Do not skip any sts or the cable will be too tight. With carriage on the right, put all NDLS into holding

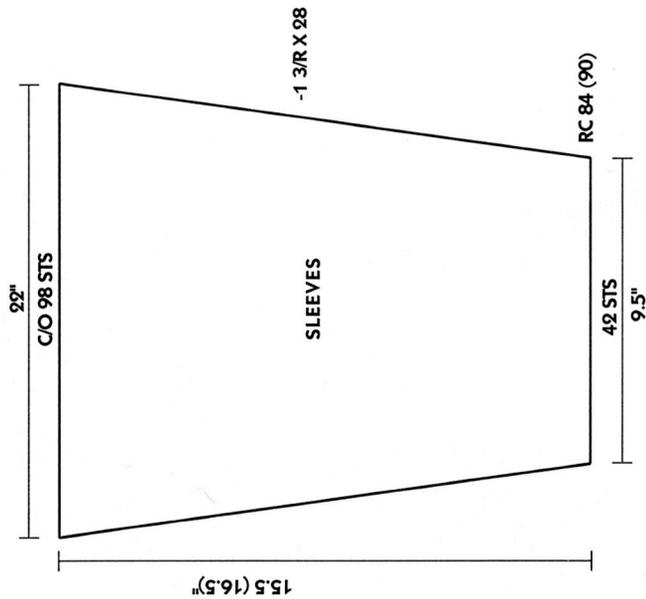

position and follow the directions for the Duffey cabled edging.

Finishing

Join one shoulder seam. With right side facing you, rehang the entire neck edge on the main bed. Hang comb and weights and transfer every other stitch to ribber bed to knit 6 rows rib. Transfer all stitches to main bed and continue with Duffey cabled edging as for other ribs.

Join second shoulder seam. Join sleeves to garment between armhole yarn tags. Right sleeve is knit side out, left sleeve is purl side out. Sew side and underarm seams, paying special attention to the ends of the cabled edgings where they join. Wash and block.

